




Round safety overflows TOPWET TWPP

BASIC INFORMATION

purpose	drainage of flat roofs, terraces and balconies
material	polyamide PA6/PVC – UV Stabil
Integrated connection sleeve	BIT – modified bituminous APP strip, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PVC - mPVC based foil, STE – of liquid sealing, VAP - self adhered vapour barrier comprised of SBS modified bitumen adhesive, laminated with high-density polyethylene top surface
colour	white
certification	ASME A112.6.4-2003
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

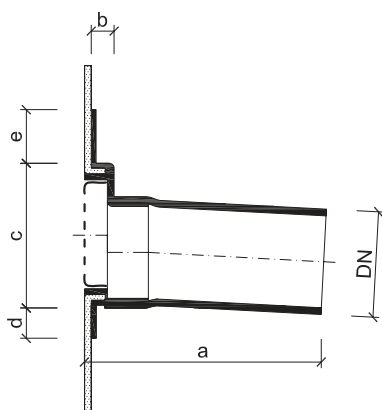

Round safety overflows

Type	DN	Dimensions [in]				
		a*	b	c	d	e
TWPP 3"	3	24	1/2	3	1	3
TWPP 4"	4	24	1/2	4 1/2	1	2 1/2
TWPP 5"	5	24	1/2	5	1	2 1/2

* possibility to extend up to 60" on request